

1/2" BOLT CONVERSION FOR HOLDEN VEHICLES

RETRACTOR AND STALK

- Please ensure that any modifications are carried out by a competent Mechanic, qualified Engineer or an Authorized Seatbelt Restraint fitter.
- It is necessary for these modifications be carried out to ensure fitment of the replacement seat belts.
- Ensure a minimum of 8mm is maintained from the outer diameter towards the edge as shown in Fig.1 & Fig.2.
- Apply antirust solution to all modified surfaces.

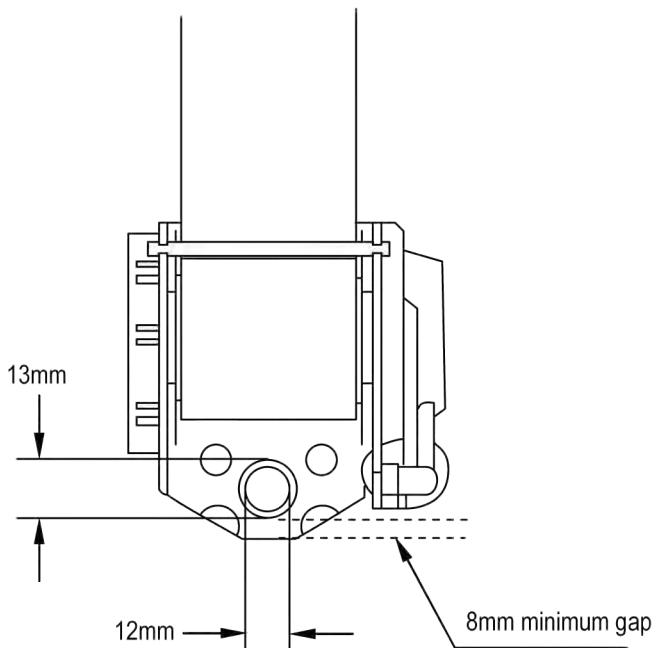


FIGURE 1

Ensure a minimum of 8mm is maintained from the outer diameter towards the edge.

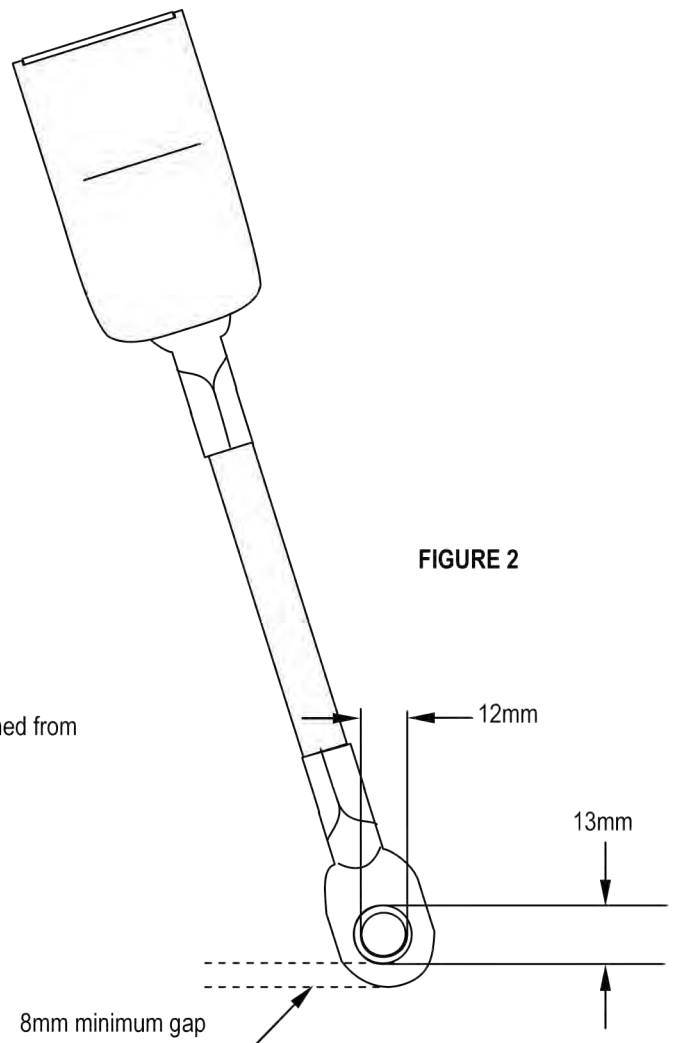


FIGURE 2

Ensure a minimum of 8mm is maintained from the outer diameter towards the edge.